





Rugged Design
Professional Quality
Proven Performance
Economically Priced

**The Profitable Source
for Finishing Products**

Gfp 865DH-3

Professional Dual Heat Laminator

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 865DH-3 delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

865DH-3

ULTIMATE FLEXIBILITY

Dual heat for thermal & cold apps

PROFESSIONAL FEATURES

Produce Professional results

FAST ROLL CHANGES

Front/Rear Swing-out shafts

EASY LOADING

3" Quick-Grip Swing-out Shafts

INDUSTRIAL DESIGN

Years of maintenance-free service




laminating • mounting • encapsulating

Our most flexible, cost-effective laminator yet

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.



- **Labor saving swing-out 3" Quick-Grip supply shafts**
- **Drop-in Quick-Grip rewind shafts**
- **Photoelectric eye for operator safety**
- **Independent top and bottom heaters**
- **Web clutch adjustment for output quality**
- **Optional motorized rear rewind**
- **Swing up feed table and 38" output height**

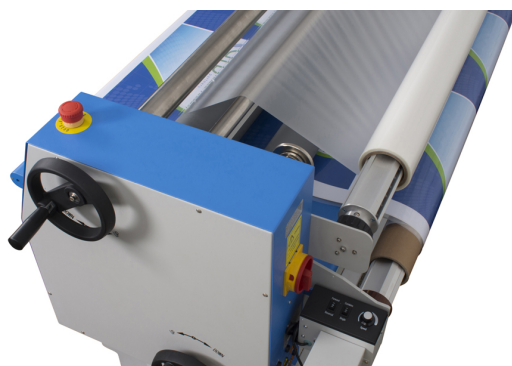

Motorized rear rewind
for roll-to-roll
applications

Front and rear swing-
out film shafts for
easy loading



865DH-3

APPLICATIONS

Signs
Posters
POP Displays
Trade show displays
Dry-erase boards
Graphic mounting
Photo mounting
Floor graphics
Window graphics
Vehicle graphics

cTUVus
Safety
Approval




Warranty:

1 year parts & labor.
Installation is included.

| | |
|----------------------------------|----------------------------|
| <i>Laminating Width</i> | 65" |
| <i>Roller Diameter</i> | 5" |
| <i>Roller Gap</i> | 1" |
| <i>Main rollers</i> | Silicone |
| <i>Supply roll diameter(max)</i> | 16" bottom, 8" top |
| <i>Film shafts</i> | 3" aluminum Quick-Grip |
| <i>Rear rewind</i> | Optional |
| <i>Max. temperature</i> | 266°F |
| <i>Heat method</i> | Quartz heater |
| <i>Film thickness</i> | 1.5 - 10mil |
| <i>Laminating speed</i> | 0-13 ft/min |
| <i>Drive motor</i> | DC geared motor |
| <i>Pressure Adjustment</i> | Dual hand wheels |
| <i>Roller heating</i> | Top & Bottom |
| <i>Power Supply</i> | 240v 60HZ Single phase 24A |
| <i>Power Consumption</i> | Max. 5760W |
| <i>Net Weight w/ stand</i> | 767 lbs. |
| <i>Dimensions</i> | 87" x 34" x 49" |
| <i>Machine shipping</i> | 893 lbs. 90 x 38" x 33" |
| <i>Stand shipping</i> | 134 lbs. 79 x 33" x 15" |

Your local dealer is:

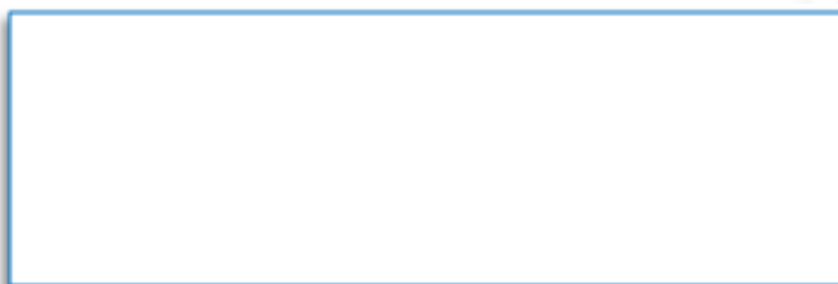

www.AirMark.com

Superior Customer Support & Product Reliability

Toll-free (800) 527-7778

AirMark Corporation
10001 Lake City Way NE
Seattle, WA 98125